



The First 40

Standard Equipment and Options

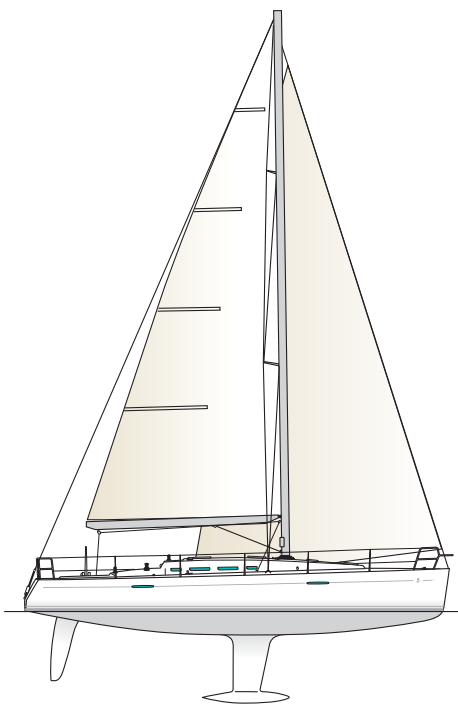

LOA	41'3"
Hull length	40'2"
LWL	35'
Beam	12'9"
Displacement	16,614 lbs
Sail area	STD 1054 sq ft
Draft	(standard) 6'4" . . .(optional) 8'
Ballast (standard)	7,369 lb
Ballast (optional)	6,610 lbs
Fuel capacity	36 gal
Water	52 gal
Auxiliary	40 hp
Hull Design:	Farr Yacht Design

Rig Dimensions: Mast	Classic
I	52'8"
J	15'1"
P	51'1"
E	17'8"

CONSTRUCTION

Hull constructed of hand-laid solid GRP bonded to a structural grid/hull liner of directional fiberglass/GRP for a strong, stiff, light composite. Vinyl ester hull barrier coat to resist osmotic blistering and zone-specific stitchmat laminates for specific increased strength optimization.

Deck constructed of Cored GRP sandwich construction for stiffness, thermal and acoustic insulation and lighter weight. Solid fiberglass reinforcements in high load areas. Integral unidirectional GRP deck beams for added strength. Main bulkheads bonded 360° to the hull and deck for rigid torsional and compression strength.

DECK EQUIPMENT

RIGGING

Standard 9/10 anodized aluminum mast and boom, keel stepped with double spreaders

Rigid boom vang

DYFORM standing rigging

Single backstay w/hydraulic adjuster

Forestay grooved foil

Mainsheet traveler on cockpit sole with "German" mainsheet system

(2) Genoa sheet tracks w/lead cars adjustable from cockpit

Rigging run back to cockpit

Complete running rigging, genoa halyard low stretch, (2) twin-braided genoa sheets, genoa sheet trim tackle, main halyard low stretch, mainsheet twin-braided, mainsail outhaul, (2) reef lines

Deck pre-fitted for spinnaker gear

(3) DOUBLE CLUTCH to port, (2) DOUBLE CLUTCH, (1) Single to starboard

WINCHES

Aluminum winches Harken self tailing:

(2) Maneuvering winches (H 44.2 STA)

(2) Genoa sheet winches (H 48.2 STA)

(2) Spinnaker winches (H48.2 STA)

(2) Aluminum winch handles

(2) Winch handle pockets

MOORING – ANCHORING

Self-bailing chain locker

(1) Stainless steel bow fitting w/removable roller

(6) Aluminum mooring cleats, stainless steel chafe guards on deck

SAFETY

(1) Stainless steel bow pulpit

(2) Stainless steel stern pulpit

Flag pole holder, life ring bracket

Double lifelines and stainless steel stanchions

COCKPIT

Self bailing cockpit

Life raft locker in cockpit sole

Propane locker to port

Cockpit bench seats w/ wood inlays

Leather covered stainless steel steering wheel (63" diameter)

Emergency tiller

Lighted compass

Engine control and control panel to starboard

STERN DECK

(1) Stainless steel swim ladder, wood treads

Open transom

ACCOMODATION

Light oak color ALPI woodwork

Parquet type laminated floors

COMPANIONWAY

Molded wood steps with non-slip surface

(2) Stainless steel handrails

FORWARD CABIN

Headroom: 6'

Double berth w/marine mattress

Hanging locker

Mirror on bulkhead forward

(2) Opening deck hatches with blind

(2) Fixed hull portholes

FORWARD HEAD

Head room: 6'1"

Shower

(1) Manual marine toilet w/21 gal. holding tank

Sink with mixing tap

(2) Mirrors

Toilet accessories: towel rail, trash bin, paper dispenser

(1) Opening deck hatch with blind

SALON

Headroom: 6'1"

(2) Salon bench seats, double density foam

Table w/2 leafs

Storage, bottle rack

(2) Stainless steel handrails

(1) Opening deck hatch with blind

(4) Fixed hull portholes

CHART TABLE TO STARBOARD

Chart table with hinged lid

Retractable navigator seat

Pivoting electrical panel enabling access to electrical connections

Navigation instrument panel (instruments not included)

Storage cabinet

(1) Opening port in coaming

GALLEY TO PORT

L-shaped kitchen

(1) Rectangular stainless steel sink w/mixer tap

Sea water foot pump

2 burner gimbaled stove w/oven

Ice box 3.4 cubic foot top opening, drained by foot pump

Cutlery drawer

Storage cabinets

Trash bin

(1) Opening port in coaming

AFT CABINS

Headroom: 6'

(2) Symmetrical cabins, each consisting of:

Double bed w/foam mattress

Hanging locker, storage/ shelves

(1) Opening port to cockpit

(1) Fixed hull port

ENGINE

Engine YANMAR Diesel MODEL 3JH4E- 40hp w/Sail Drive

Flush engine control in aluminum, key ignition, control panel in cockpit

Engine bed integrated in hull liner, soundproofed compartment w/insulating foam

Alternator 12 Volt, 80 Amp

(1) Rotomolded fuel tank 36 gal (between the 2 aft cabins under berth), w/gauge

Engine raw water filter

Folding two-blade propeller

(1) Engine access through companionway, (2) access through aft cabins

ELECTRICAL

12 Volt circuit

(1) House battery (1 x 110 Amp), (1) engine battery (110Amp)

Electrical panel 12 Volt (breaker, voltmeter, water gauge, fuel gauge, battery warning, fuel warning)

(1) 12 Volt socket

Lights: Halogen ceiling lights, swivel reading lamps

Navigation, anchor, and deck lights

PLUMBING

(2) Rotomolded freshwater tanks (2 x 26 gal under the port and starboard salon bench seats) w/manifolds for tank selection

Fresh water pressure system, expansion tank

Sea water foot pump/icebox drain

Electric shower drain pump

(1) Manual bilge pump, (1) electric bilge pump

GAS

Storage for (1) propane tank in cockpit

OPTIONS

Consult your dealer for all available options

including the "Ambition" Deluxe version